

# DO-214 Style Diodes - 1,800V

Original Release: 01-15-08  
Revised Date: 08-05-08

**0.5A - 1.0A • 30ns - 70ns**

ELECTRICAL CHARACTERISTICS AND MAXIMUM RATINGS													
Part Number	Working Reverse Voltage (Vrwm)	Average Rectified Current (Io)		Reverse Current @ Vrwm (Ir)		Forward Voltage (Vf)		1 Cycle Surge Current tp=8.3ms (Ifsm)	Repetitive Surge Current (Ifrm)	Reverse Recovery Time (3) (Trr)	Thermal Impd. $\theta_{J-L}$	Junction Cap. @50VDC @1kHz (Cj)	Markings
		55°C(1)	100°C(2)	25°C	100°C	25°C	25°C	25°C	25°C	25°C	25°C	25°C	
	Volts	Amps	Amps	$\mu$ A	$\mu$ A	Volts	Amps	Amps	Amps	ns	°C/W	pF	
MD90FF18J	1800	0.50	0.25	1.0	25	4.0	0.50	20	4	30	13	20	FF18
MD90U18J	1800	1.00	0.50	1.0	25	3.6	0.50	20	5	70	13	20	U18





(1)TC=55°C (2)TC=100°C (3)If=0.5A, Ir=1.0A, Irr=0.25A \*Op. Temp.= -65°C to +175°C Stg. Temp.= -65°C to +200°C

Application Note: Voltage rating in air 800V<sub>MAX</sub> Operating at voltage > 800V Requires conformal coating or encapsulation.

Plating:  
Tin plating per MIL-T-10727, Type 1, 200-400µin, matte finish.

Tolerance:  
.XXX ±.005

**BETA VERSION**

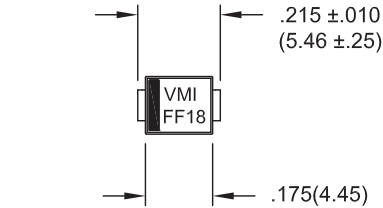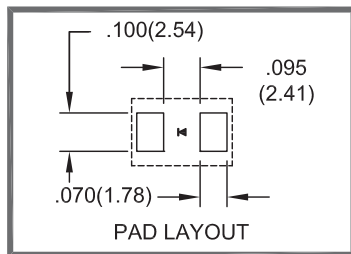

Dimensions: In. (mm) • All temperatures are ambient unless otherwise noted. • Data subject to change without notice.



Voltage Multipliers Inc.

8711 W. Roosevelt Ave.  
Visalia, CA 93291 USA

Tel: 559.651.1402  
Fax: 559.651.0740

www.voltagemultipliers.com  
www.highvoltagepowersupplies.com